

Our natural septic & mound solution

Reliable Eco^z Septic & Mound minimizes odor and system clogs

Eco^z Septic & Mound increases solids reduction in septic tanks and mounds to prevent drainfield backups. It maintains a healthy level of scum and sludge in septic tanks by digesting grease, food and feces.

Eco^z Septic & Mound utilizes biodegradable surfactants to emulsify grease, oil and organic binders, along with a natural blend of enzymes to increase the activity and numbers of microbes present.

By accelerating the natural remediation process, Eco^z Septic & Mound is the safe chemical free supplement for your system.


- Accelerates breakdown of grease and odor causing contaminants
- Prevents exceeding tank or mound capacity prematurely
- Minimizes pumping frequency
- Reduces buildup in drainfield lines
- Safe for ground water
- Phosphate, solvent and toxin free

Eco^z Products

Toll-free: 888.669.5675
sales@ecozproducts.com

Eco^z Septic & Mound

Eco^z

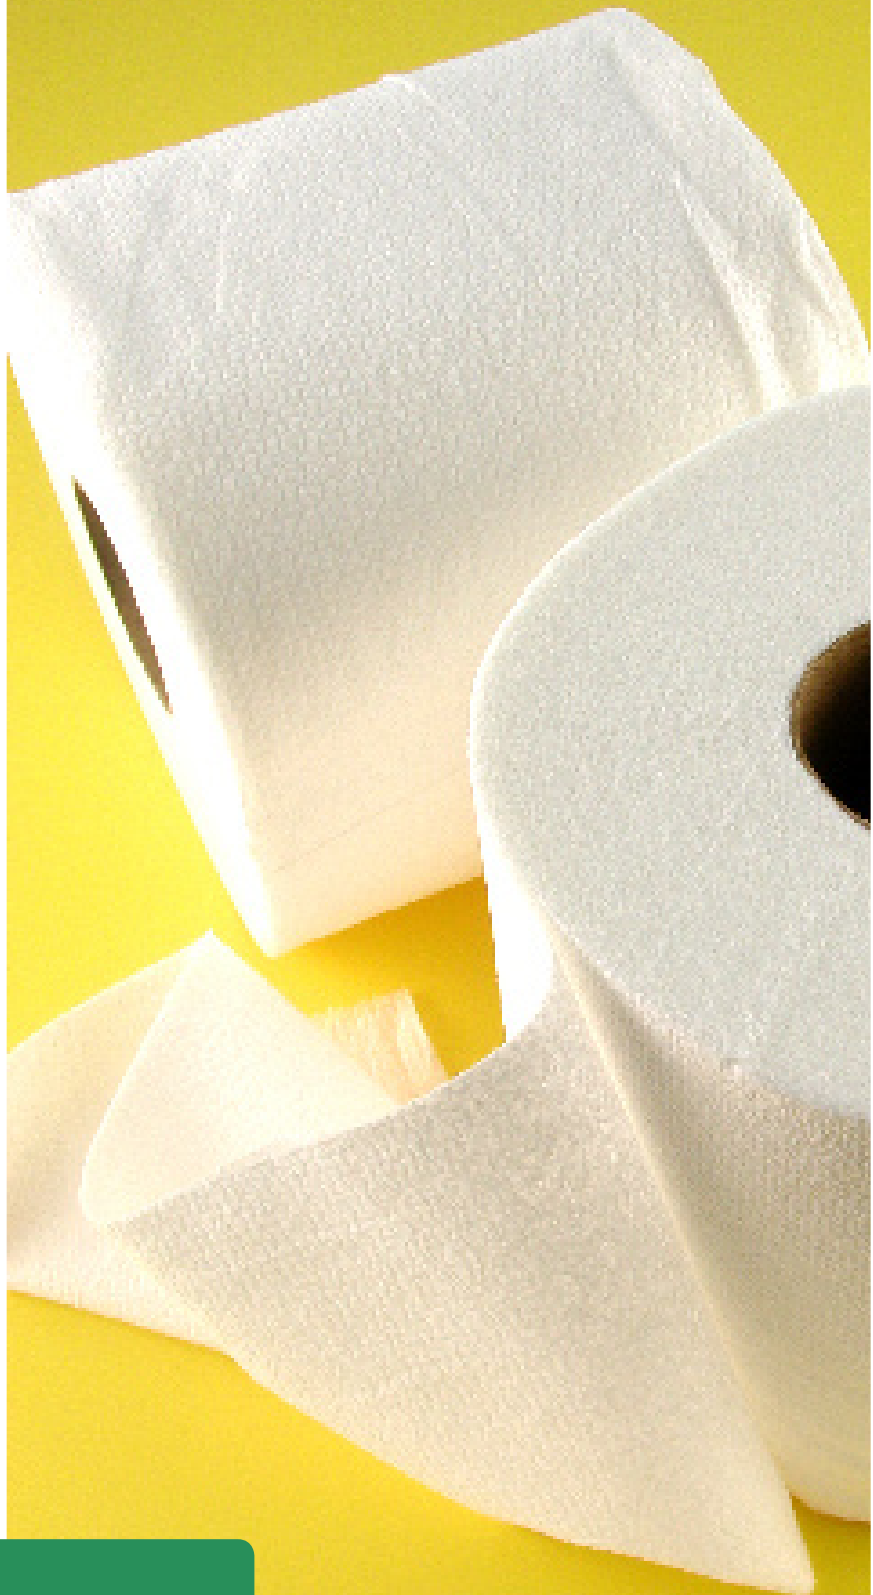



Eco² Septic & Mound

Usage Recommendations

Application

Residential: 2 ounces per week for systems under 1000 gallons
Mix with 1 gallon fresh water and add to system

Private Utility / Commercial System: 8 ounces per week per 1000 gallons
Mix with 5 gallons fresh water and add to system at low flow period or use a feed system to regularly add product

Drainfield Opener: 20 ounces per 150 sq. ft. of drainfield area
Mix with 10 gallons fresh water and spray topically; then spray with water until soil is fully saturated. Repeat as needed.

For Optimum Results

- Add product at night or at low usage times.
- Dilute with warm to lukewarm (105°–115° F) water when possible.
- When starting with this product, jump start a system by adding a second dose in the first week.
- Use Eco² Drains to treat any slow drains in system.

Technical Specs

pH Range: 3.25–4.20
 Fragrance: None added
 Appearance: Translucent amber liquid

Packaging, Handling and Storage

Size	Pkg	Dimensions (LxWxH)	Weight
1-gal	4/cs	15" x 10" x 10"	39 lbs
5-gal	pail	12" x 10" x 15"	48 lbs
55-gal	drum	24" dia. x 36" H	475 lbs

Store this product out of direct sunlight in a cool dry area. For best results, use within 12 months. Request an Eco² Septic & Mound MSDS for more specific information.

Disclaimer

This information is based on data considered accurate. However, no warranty is expressed or implied regarding the accuracy of this data or the results obtained from the use thereof. GLB, Incorporated assumes no responsibility for personal injury or property damage to the Vendee, Users or Third Parties caused by the material. Such Vendees or Users assume all risks associated with the use of this material. The contents of this document are subject to change without notice.

Eco² Products

Toll-free: 888.669.5675
sales@eco2products.com